

RV9000

IMPACT TRAFFIC DOOR

Designed to withstand heavy constant traffic in abusive applications.

FEATURES


- Tough ABS Exterior Finish.
- Sizes to suit your openings
- Numerous window configurations

APPLICATIONS

- Retail
- Restaurant
- Supermarket
- Food Service
- Cold Storage
- Institutional

TRAFFIC

- Pedestrian Carts
- Non motorized carts
- Pallet Jack

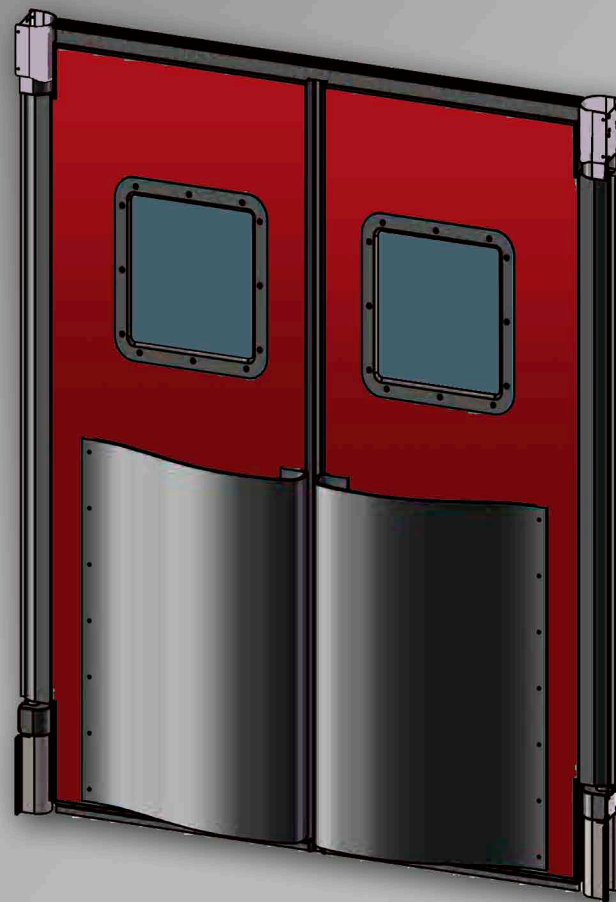

V-Cam/Roller assembly hinge.

Aluminum extrusion back edge reinforcement.



RV9000

IMPACT TRAFFIC DOOR

Designed to withstand heavy constant traffic in abusive applications.

SPECIFICATIONS

Door Body:

1 1/2" thick door panel constructed with polyethylene foam core, aluminum internal frame, chemically bonded outer ABS door face. All edges are a radius bull nose with fully replaceable gaskets. Back spine is extruded aluminum, through bolted to the structure of the panel.

Windows:

14 1/2" x 22 1/2" size as standard, (optional sizes are available) frames are vacuum formed ABS, mechanically fastened to the face of the door. Frames and windows are replaceable. Window is polycarbonate material, 1/8" thick.

Hinge:

Upper hinge is a "V" cam hinge, fastened to the door jamb complete with a roller assembly providing smooth self closing operation. Hold open device feature is optional. Lower hinge is a one piece jamb guard, made of extrude aluminum material, fastened to the jamb, floor/jamb anchored units available as an option.


Options:

Bumpers, Impact plates, window configurations, and 6 colours.

From the busy stockroom areas for high volume grocery stores, to forklift traffic in cold storage and food processing operations the RV9000 will provide many years of trouble free reliable service.

The RV9000 has a **24 month factory defect warranty**, and a 60 month hinge warranty.

COLOURS

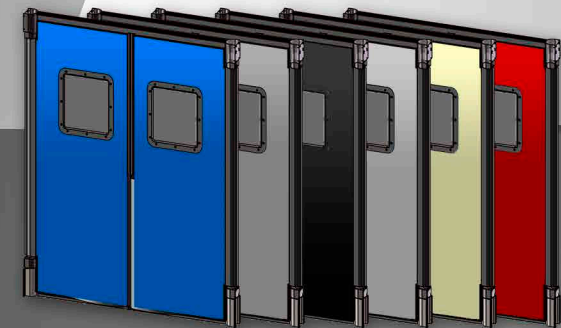

Royal Blue, Metallic Gray, Black, Cloud Gray, Beige, Red.

OPTIONAL ACCESORIES

-Windows Sizes: 10"×16", 12"×18", 16"×16", 10"×30", 24"×24".

-Bumper & Kickplate Sizes: 12", 18", 24", 36", 42".

-Door sizes are all made to suit your openings.

